



JioThings



MLDW4815-1E


Linear LED DRIVER (Dimable)

Output : 5-48VDc- 350 mA

RIPPLE FREE

Areas of application

- Suitable for indoor installations
- Suitable for luminaires of protection classes I and II

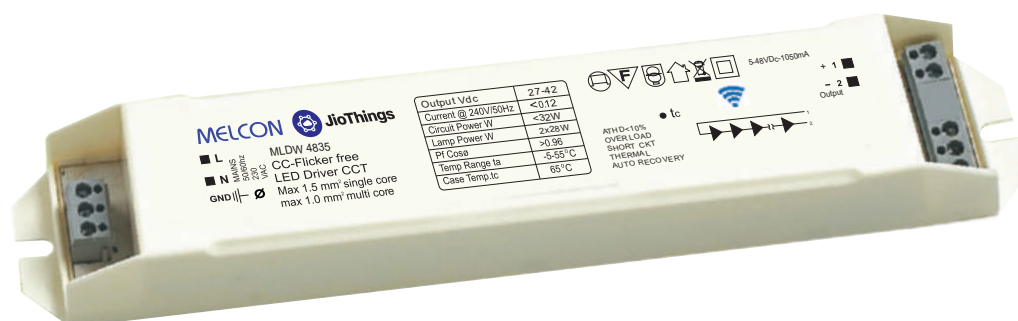

Compatible with: Amazon Alexa, Google Home-Assistant

Product benefits

- Wide Operating Range 100~264VAc
- O/P overload-S/C, over temperature
- High efficiency and reliability,
- High Quality branded Components for better reliability
- Small PCFR-White housing.
- ATHD<10%,Efficiency >85%.

Product features

- Supply voltage: 220...240 VAc
- Line frequency: 50 Hz | 60 Hz
- Line voltage: 100...264 VAc
- Safety according to EN 61347-1, 61347-2-13, 62384
- EMI CE suppression: to EN 55015A
- Line harmonics according to EN 61000-3-2
- Immunity according to EN 61547
- Lifetime: up to 50,000 h (temperature at $T_c = 65^\circ\text{C}$, max. 10 % failure rate)

Sr.No	Input Specifications	Output Specifications	Cat. No.
1	100-290VAc	5-48VDc 350 mA	MLDW4815-1E


Product datasheet

Dimensions



Length	210mm
Width	40mm
Height	28mm
Mounting hole spacing, length	200mm

Connections:

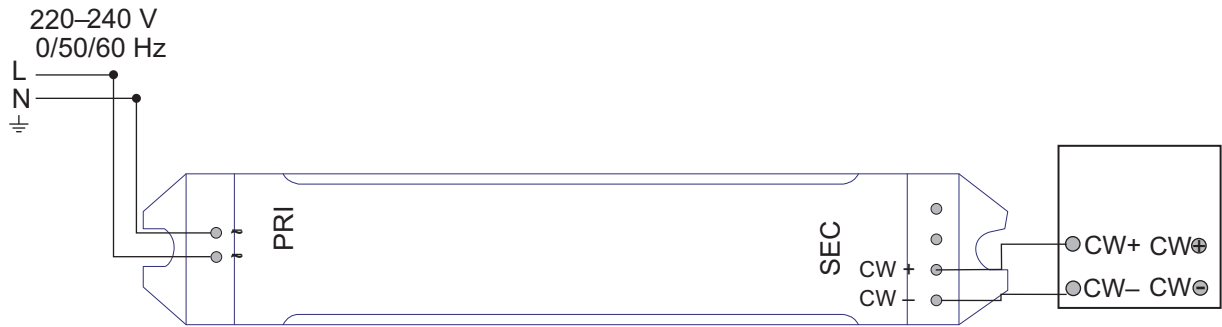

Logistical data

Product code	Product description	Packaging unit (Pieces/Box)	Dimensions (length x width x Volume height)	Gross weight
MLDW4815-1E	CONSTANT CURRENT LED DRIVER	Per tray 20pc	240 mm x 210 mm x 80 mm	3.16 kg
MLDW4815-1E	CONSTANT CURRENT LED DRIVER	Shipping carton box100/Box (5 Trays/Box)	240 mm x 210 mm x 80 mm	3.70 dm ³ 19.00 Kg

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Ordering Information:

M

MELCON

L

LED

D

C-Constant
F-Flicker Free
D- Dimming
M- Master
S- Slave
N- Non-Isolated

W

A- Analog Dim
B-Bluetooth
C-Current
D-Dali Dim
P-PWM Dim
R-Potentiometer
S-Switch(AOI)
T-Triac Dim
V-Voltage
W-Wi-Fi
Z-Zigbee

4

O/P Voltage

8

3

5

O/P Power

1

E

O/P channels
1E- Mono Color
2E- Tunable white

Works with





JioSmartLiving



Version Change History:

Sr.	Revision	Notes	Date